



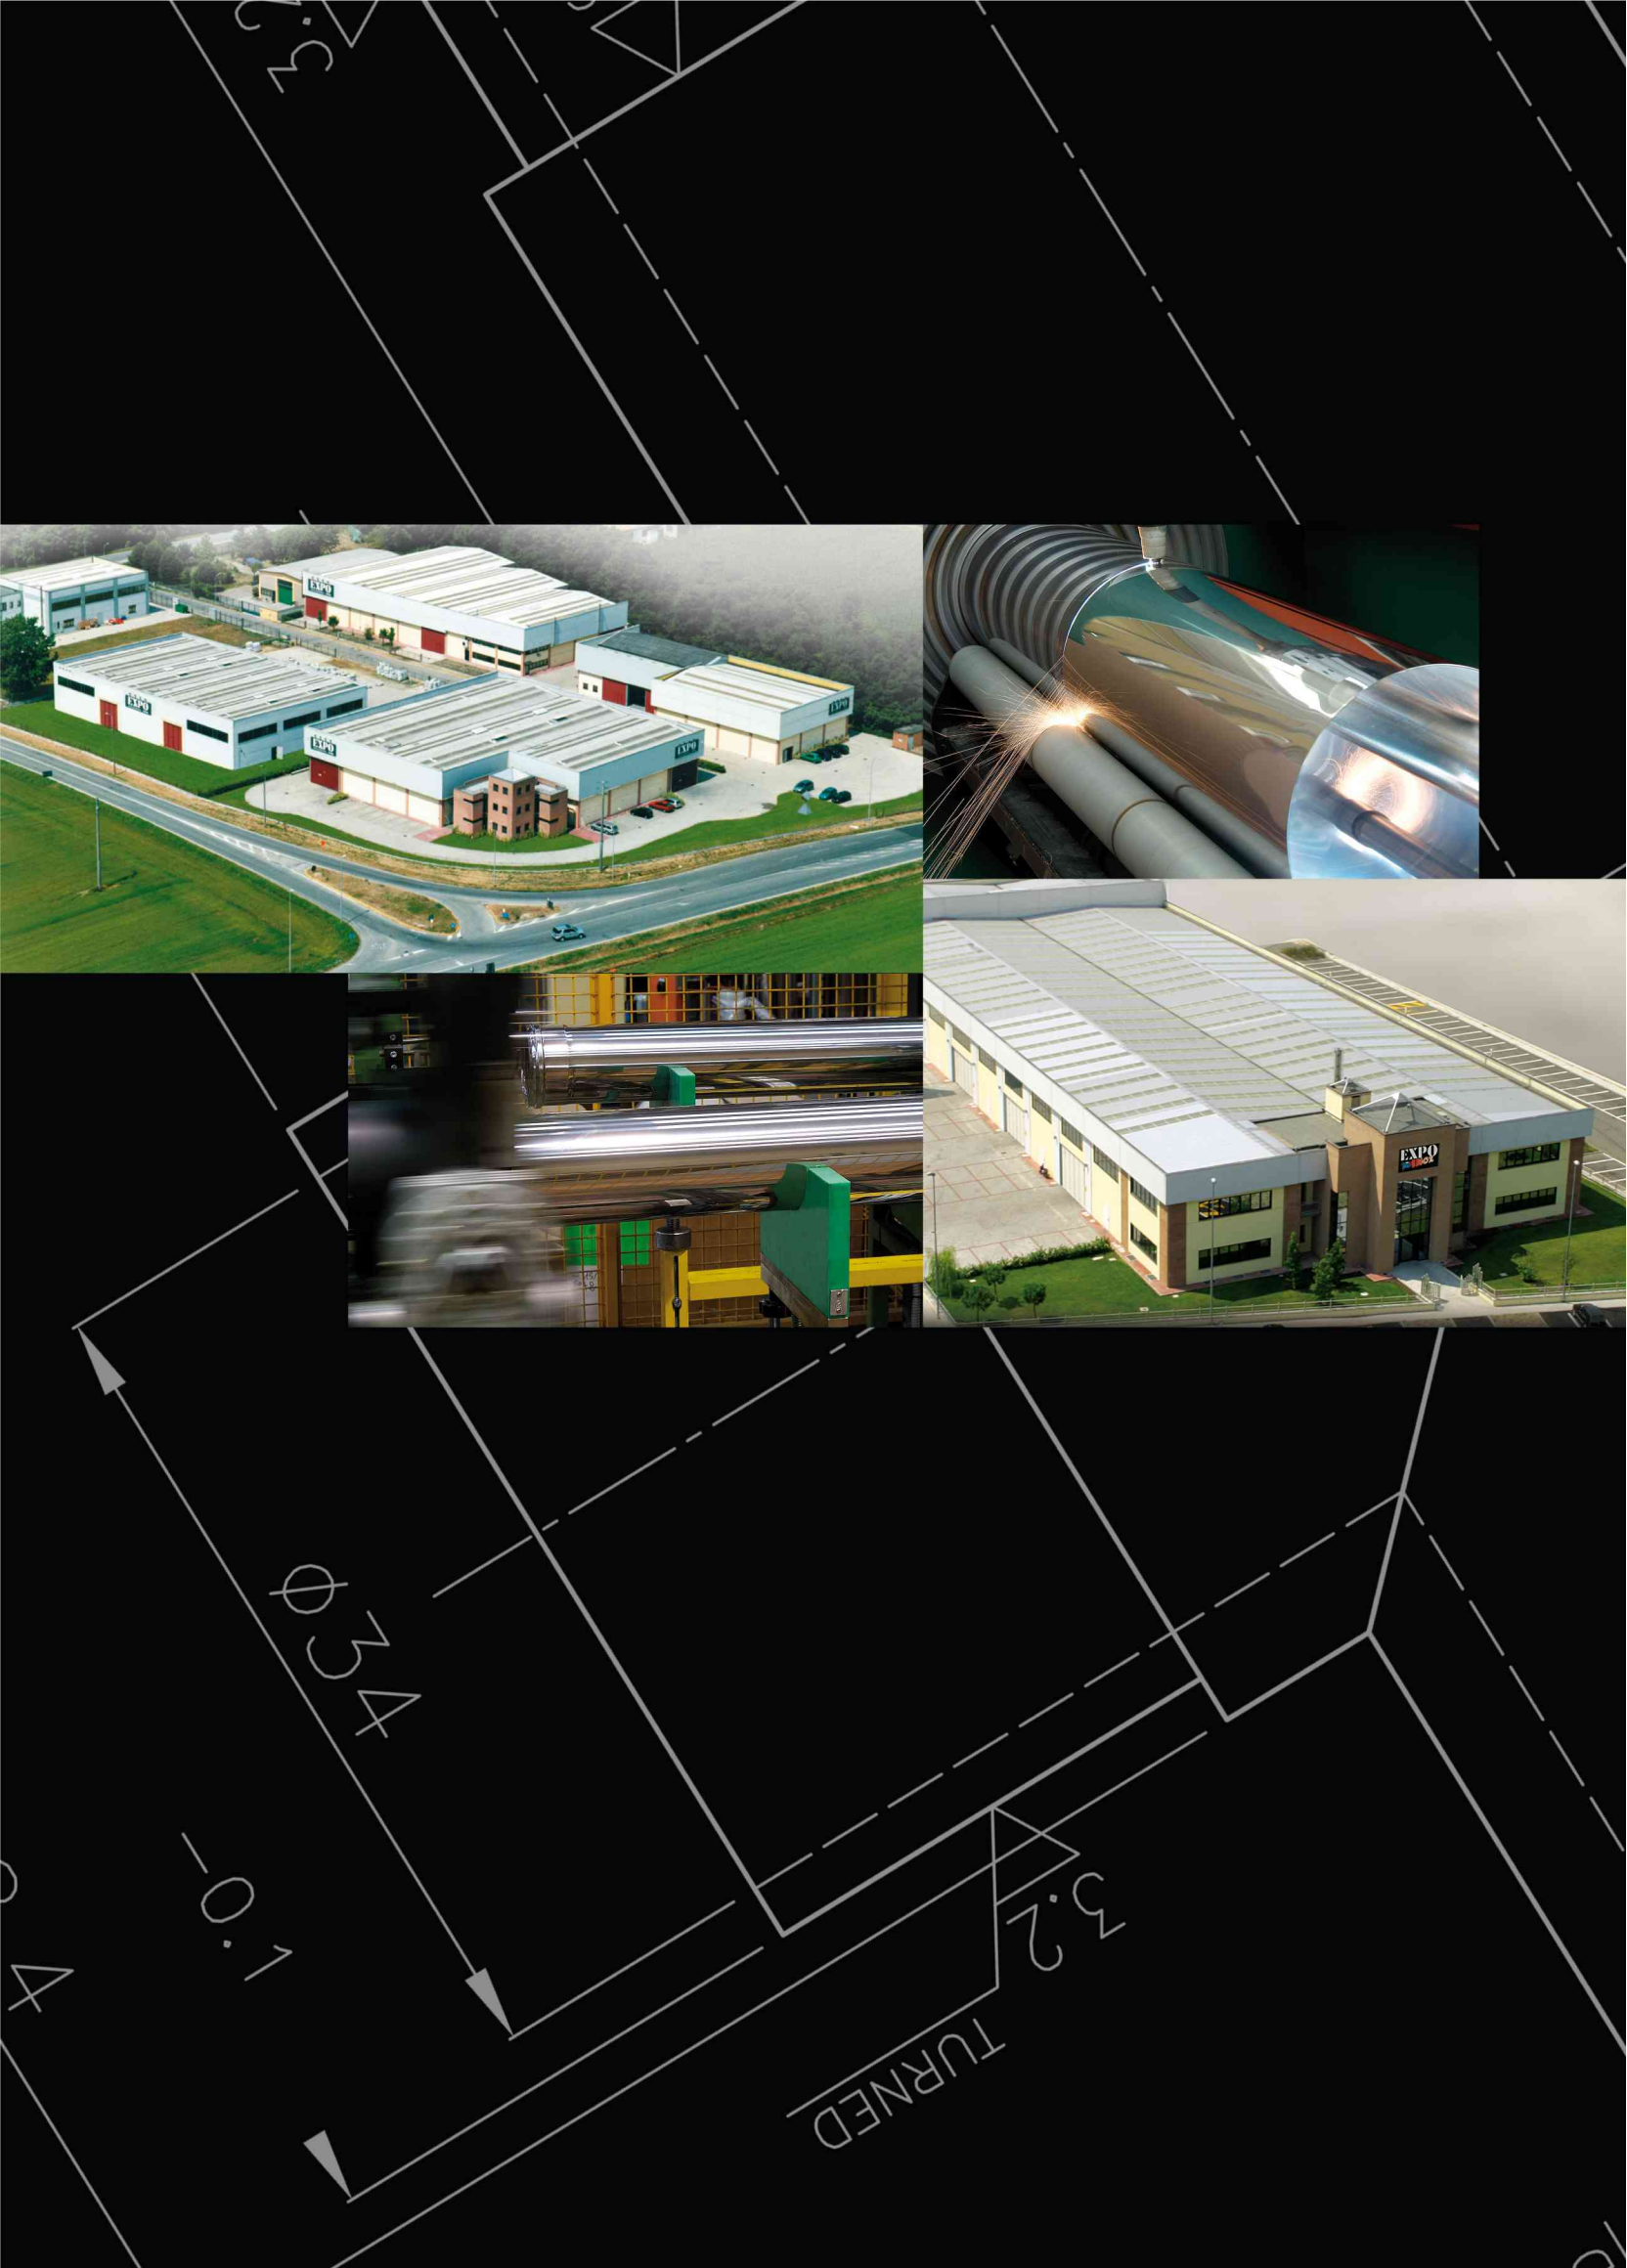

**SDW50**

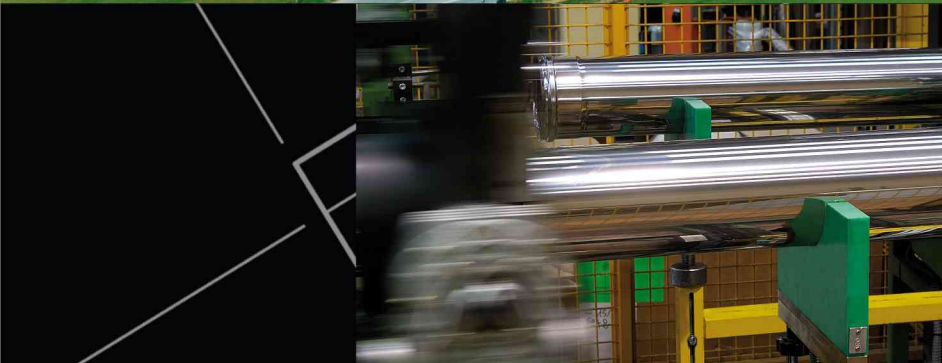

## ACÉLA HÁZBAN

EXPO INOX hosszú ideje saválló acél gyártással és feldolgozással foglalkozik. Minden megkeresést pontos tervezés követ; termékeink innovatív technológiája, sokoldalúsága és az anyagok hosszú élettartama tesz minket képessé arra, hogy fejlett műszaki tartalommal, esztétikus termékeket nyújtsunk a legmagasabb minőségben. A rozsdamentes acél ideális az egyszerű vagy éppen összetettebb design megalkotására, beléllszkedve a meglévő környezetbe. Az acéllal történő tervezés az elvárt eredményt nyújtja vásárlóinknak, legyen szó akár a legkifinomultabb kérésről - ez a mi filozófiánk.

## BUILDING WITH STAINLESS STEEL

EXPO INOX has been involved in stainless steel production for a long time. Every request is subjected to an accurate planning; the innovative techniques of our products, the multi purpose nature and long lasting characteristics of this material, enable us to propose advanced technical, aesthetical and design solutions of the highest quality. Stainless steel is ideal for linear and essential design creations, matching and respecting the environment in which it is placed. Design with stainless steel, give the customer the result he desires even to the most demanding requests: this is our main objective.

# EXPO INOX



67.6

20






SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXTDP1C..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 1 méteres  
hosszelem

Length 1 m double wall 50 mm  
insulated

Øi	Øe	H	A	B
80	180	940	65	54
100	200	940	65	54
130	230	940	65	54
150	250	940	65	54
180	280	940	65	54
200	300	940	65	54
250	350	940	65	54
300	400	940	65	54
350	450	940	65	54
400	500	940	65	54
450	550	940	65	54
500	600	940	65	54
550	650	940	65	54
600	700	940	65	54
650	750	940	65	54
700	800	940	65	54
750	850	940	65	54
800	900	940	65	54



SEXTDP5C..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 0,5 méteres  
hosszelem

Length 0,5 m double wall 50 mm  
insulated

Øi	Øe	H	A	B
80	180	440	65	54
100	200	440	65	54
130	230	440	65	54
150	250	440	65	54
180	280	440	65	54
200	300	440	65	54
250	350	440	65	54
300	400	440	65	54
350	450	440	65	54
400	500	440	65	54
450	550	440	65	54
500	600	440	65	54
550	650	440	65	54
600	700	440	65	54
650	750	440	65	54
700	800	440	65	54
750	850	440	65	54
800	900	440	65	54



SEXTDP2C..



● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 0,3 méteres  
hosszelem

Length 0,33 m double wall 50 mm  
insulated

Øi	Øe	H	A	B
80	180	270	65	54
100	200	270	65	54
130	230	270	65	54
150	250	270	65	54
180	280	270	65	54
200	300	270	65	54
250	350	270	65	54
300	400	270	65	54
350	450	270	65	54
400	500	270	65	54
450	550	270	65	54
500	600	270	65	54
550	650	270	65	54
600	700	270	65	54
650	750	270	65	54
700	800	270	65	54
750	850	270	65	54
800	900	270	65	54




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXTDP25C..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 0,25 méteres  
hosszelem

Length 0,25 m double wall 50 mm  
insulated



SEXETDP4C..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - Állítható  
hosszelem

Adjustable length double wall 50 mm  
insulated



SEXGDP90C..



● könyök DW inox 50 90° DN 80/180  
AISI 316L BA vastagság 0,4 mm

bend DW inox 50 90° DN 80/180  
AISI 316L BA thickness 0,4 mm

Øi	Øe	H	A	B
80	180	190	65	54
100	200	190	65	54
130	230	190	65	54
150	250	190	65	54
180	280	190	65	54
200	300	190	65	54
250	350	190	65	54
300	400	190	65	54
350	450	190	65	54
400	500	190	65	54
450	550	190	65	54
500	600	190	65	54
550	650	190	65	54
600	700	190	65	54
650	750	190	65	54
700	800	190	65	54
750	850	190	65	54
800	900	190	65	54

Øi	Øe	H	A	B	C
80	180	390	65	54	260
100	200	390	65	54	260
130	230	390	65	54	260
150	250	390	65	54	260
180	280	390	65	54	260
200	300	390	65	54	260
250	350	390	65	54	260
300	400	390	65	54	260
350	450	390	65	54	260
400	500	390	65	54	260
450	550	390	65	54	260
500	600	390	65	54	260
550	650	390	65	54	260
600	700	390	65	54	260
650	750	390	65	54	260
700	800	390	65	54	260
750	850	390	65	54	260
800	900	390	65	54	260

Øi	Øe	H	A	B	C
80	180	190	65	130	54
100	200	200	65	140	54
130	230	215	65	155	54
150	250	225	65	165	54
180	280	238	65	178	54
200	300	250	65	190	54
250	350	275	65	215	54
300	400	321	65	261	54
350	450	367	65	307	54
400	500	392	65	332	54
450	550	417	65	357	54
500	600	442	65	382	54
550	650	467	65	407	54
600	700	492	65	432	54
650	750	517	65	457	54
700	800	542	65	482	54
750	850	567	65	507	54
800	900	592	65	532	54




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXGDP45C..




● SZIGETELT (50MM) BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - 45° os könyök

Elbow 45° TIG welded double wall 50 mm insulated



SEXGDP30C..




● könyök DW inox 50 30° DN 80/180 AISI 316L BA vastagság 0,4 mm

bend DW inox 50 30° DN 80/180 AISI 316L BA thickness 0,4 mm



SEXGDP15C..



● könyök DW inox 50 15° DN 80/180 AISI 316L BA vastagság 0,4 mm

bend DW inox 50 15° DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	H	A	B	E
80	180	137	65	54	79
100	200	143	65	54	82
130	230	160	65	54	88
150	250	164	65	54	91
180	280	174	65	54	94
200	300	184	65	54	98
250	350	197	65	54	105
300	400	215	65	54	114
350	450	234	65	54	123
400	500	252	65	54	130
450	550	270	65	54	138
500	600	287	65	54	145
550	650	334	65	54	164
600	700	352	65	54	172
650	750	369	65	54	169
700	800	387	65	54	186
750	850	405	65	54	194
800	900	423	65	54	202

Øi	Øe	H	A	B	E
80	180	130	65	54	51
100	200	135	65	54	51
130	230	142	65	54	53
150	250	147	65	54	54
180	280	154	65	54	56
200	300	160	65	54	57
250	350	172	65	54	60
300	400	184	65	54	63
350	450	197	65	54	67
400	500	210	65	54	70
450	550	222	65	54	74
500	600	235	65	54	77
550	650	282	65	54	93
600	700	295	65	54	96
650	750	307	65	54	99
700	800	320	65	54	103
750	850	332	65	54	106
800	900	344	65	54	109

Øi	Øe	H	A	B	E
80	180	119	65	54	23
100	200	121	65	54	24
130	230	125	65	54	25
150	250	128	65	54	24
180	280	131	65	54	25
200	300	134	65	54	25
250	350	141	65	54	26
300	400	147	65	54	27
350	450	154	65	54	28
400	500	160	65	54	29
450	550	167	65	54	30
500	600	173	65	54	31
550	650	214	65	54	36
600	700	220	65	54	37
650	750	225	65	54	38
700	800	233	65	54	39
750	850	240	65	54	40
800	900	248	65	54	41






SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXRTDPC..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 90° os T idom

90° tee double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	440	242	165
100	200	440	242	175
130	230	440	242	190
150	250	440	242	200
180	280	440	242	213
200	300	440	242	225
250	350	490	267	250
300	400	588	322	275
350	450	710	380	300
400	500	710	380	325
450	550	760	405	350
500	600	810	430	375
550	650	810	430	400
600	700	840	445	425
650	750	890	470	450
700	800	940	495	475
750	850	990	520	500
800	900	1040	545	525



SEXRTIC..




● T idom DW inox 50 45° DN 80/180  
AISI 316L BA vastagság 0,4 mm

tee DW inox 50 45° DN 80/180 AISI  
316L BA thickness 0,4 mm

Øi	Øe	H	A
80	180	390	241
100	200	440	258
130	230	470	273
150	250	515	300
180	280	560	344
200	300	560	344
250	350	640	386
300	400	883	496
350	450	940	515
400	500	1020	542
450	550	1020	593
500	600	1092	653
550	650	1122	696
600	700	1164	739
650	750	1280	781
700	800	1290	824
750	850	1342	867
800	900	1394	910



SEXRTDPCU..



● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - 90° os Tidom

90° reducing tee to single wall Ø 80  
mm double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	190	123	115
100	200	190	123	125
130	230	190	123	140
150	250	190	123	150
180	280	190	123	165
200	300	190	123	175
250	350	190	123	200
300	400	190	123	225




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXPF..




● elem DW inox 50 füstgáz ellenőrző idom DN 80/180 AISI 316L BA vastagság 0,4 mm

element DW inox 50 element for smokes test DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	H	A	B
80	180	190	65	54
100	200	190	65	54
130	230	190	65	54
150	250	190	65	54
180	280	190	65	54
200	300	190	65	54
250	350	190	65	54
300	400	190	65	54
350	450	190	65	54
400	500	190	65	54
450	550	190	65	54
500	600	190	65	54
550	650	190	65	54
600	700	190	65	54
650	750	190	65	54
700	800	190	65	54
750	850	190	65	54
800	900	190	65	54



SXPFT..




● SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - Füstgáz ellenőrző idom

Element for smoke and temperature test with threaded sleeve double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	440	65	54
100	200	440	65	54
130	230	440	65	54
150	250	440	65	54
180	280	440	65	54
200	300	440	65	54
250	350	440	65	54
300	400	440	65	54
350	450	440	65	54
400	500	440	65	54
450	550	440	65	54
500	600	440	65	54
550	650	440	65	54
600	700	440	65	54
650	750	440	65	54
700	800	440	65	54
750	850	440	65	54
800	900	440	65	54



SEXTMFC..



● SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - Füstgáz ellenőrző idom

Element with plate for smoke and temperature test with threaded sleeve double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	440	113	190
100	200	440	113	190
130	230	440	113	190
150	250	440	113	190
180	280	440	113	190
200	300	440	113	190
250	350	440	185	280
300	400	440	185	280
350	450	440	185	280
400	500	440	185	280
450	550	440	185	280
500	600	440	185	280
550	650	440	185	280
600	700	440	185	280
650	750	440	185	280
700	800	440	185	280
750	850	440	185	280
800	900	440	185	280




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXTSIDPC..




● SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - Egyenes ellenőrző idom kör alakú

Inspection length with round door double wall 50 mm insulated

Øi	Øe	Øx	H
80	180	80	270
100	200	100	270
130	230	130	270
150	250	150	270
180	280	180	440
200	300	200	440
250	350	200	440
300	400	200	440
350	450	200	440
400	500	200	440
450	550	200	440
500	600	200	440
550	650	200	440
600	700	200	440
650	750	200	440
700	800	200	440
750	850	200	440
800	900	200	440



SEXDPERC..




● SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - Ellenőrző idom kizárólag negatív

Inspection length with square door double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	440	113	190
100	200	440	113	190
130	230	440	113	190
150	250	440	113	190
180	280	440	113	190
200	300	440	113	190
250	350	440	185	280
300	400	440	185	280
350	450	440	185	280
400	500	440	185	280
450	550	440	185	280
500	600	440	185	280
550	650	440	185	280
600	700	440	185	280
650	750	440	185	280
700	800	440	185	280
750	850	440	185	280
800	900	440	185	280



SEXCSDP..



● SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - fali konzol


Cantilever brackets (pair) double wall 50 mm insulated

Øi	Øe	A
80	180	280
100	200	300
130	230	330
150	250	350
180	280	380
200	300	400
250	350	450
300	400	500
350	450	550
400	500	600
450	550	650
500	600	700
550	650	750
600	700	800
650	750	850
700	800	900
750	850	950
800	900	1000




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304

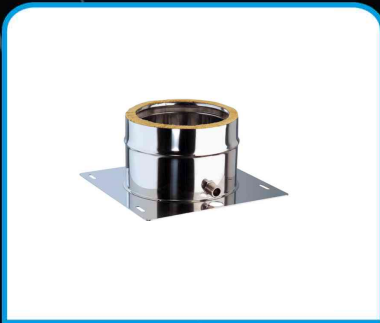

SEXPIASTRC..




● lap DW inox 50 indító idom  
kondenzelvezetővel DN 80/180 AISI  
316L BA vastagság 0,4 mm

plate DW inox 50 base plate with  
drain plug DN 80/180 AISI 316L BA  
thickness 0,4 mm

Øi	Øe	A	B	C
80	180	280	100	54
100	200	300	100	54
130	230	330	100	54
150	250	350	100	54
180	280	380	100	54
200	300	400	100	54
250	350	450	100	54
300	400	500	100	54
350	450	550	100	54
400	500	600	100	54
450	550	650	100	54
500	600	700	100	54
550	650	750	100	54
600	700	800	100	54
650	750	850	100	54
700	800	900	100	54
750	850	950	100	54
800	900	1000	100	54



SEXPIASIC..




● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - Köztes súlyidom

Intermediate anchor plate double wall  
50 mm insulated

Øi	Øe	H	A
80	180	190	280
100	200	190	300
130	230	190	330
150	250	190	350
180	280	190	380
200	300	190	400
250	350	190	450
300	400	190	500
350	450	190	550
400	500	190	600
450	550	190	650
500	600	190	700
550	650	190	750
600	700	190	800
650	750	190	850
700	800	190	900
750	850	190	950
800	900	190	1000



SEXPIASICDM..



● SZIGETELT (50MM)BELSŐ  
HASZONCSŐ: aisi 316L, KÜLSŐ  
KÖPENY: AISI304 - Köztes súlyidom  
Egyfalú/ szigete

Intermediate anchor plate single -  
double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	190	230	98
100	200	190	250	98
130	230	190	280	98
150	250	190	300	98
180	280	190	330	98
200	300	190	350	98
250	350	190	400	98
300	400	190	450	98
350	450	190	500	98
400	500	190	550	98
450	550	190	600	98
500	600	190	650	98
550	650	190	700	98
600	700	190	750	98
650	750	190	800	98
700	800	190	850	98
750	850	190	900	98
800	900	190	950	98




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXTAPDP4C..




DW inox 50 kondenz elvezető DN 80/180 AISI 316L BA vastagság 0,4 mm

DW inox 50 condense drain DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	A	B	C
80	180	65	54	12
100	200	65	54	12
130	230	65	54	12
150	250	65	54	12
180	280	65	54	12
200	300	65	54	12
250	350	65	54	12
300	400	65	54	12
350	450	65	54	12
400	500	65	54	12
450	550	65	54	12
500	600	65	54	12
550	650	65	54	12
600	700	65	54	12
650	750	65	54	12
700	800	65	54	12
750	850	65	54	12
800	900	65	54	12



SEXTC..




DW inox 50 T sapka DN 80/180 AISI 316L BA vastagság 0,4 mm

DW inox 50 tee cap DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	A	B
80	180	55	54
100	200	55	54
130	230	55	54
150	250	55	54
180	280	55	54
200	300	55	54
250	350	55	54
300	400	55	54
350	450	55	54
400	500	55	54
450	550	55	54
500	600	55	54
550	650	55	54
600	700	55	54
650	750	55	54
700	800	55	54
750	850	55	54
800	900	55	54



SEXCCDPC..



SZIGETELT (50MM)BELSŐ HASZONCSŐ: aisi 316L, KÜLSŐ KÖPENY: AISI304 - Esővédő sapka

Rain cap double wall 50 mm insulated

Øi	Øe	H	A	B
80	180	190	265	65
100	200	190	265	65
130	230	230	320	65
150	250	230	320	65
180	280	250	400	65
200	300	250	400	65
250	350	270	500	65
300	400	270	600	65
350	450	300	720	65
400	500	300	720	65
450	550	330	850	65
500	600	330	850	65
550	650	330	900	65
600	700	360	1150	65
650	750	370	1250	65
700	800	380	1350	65
750	850	390	1400	65
800	900	400	1450	65




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXTADPC..




záró DW inox 50 viharsapka DN 80/180 AISI 316L BA

terminal DW inox 50 anti down-draught terminal DN 80/180 AISI 316L BA

Øi	Øe	H	A	B	C
80	180	325	222	165	65
100	200	375	260	200	65
130	230	405	303	200	65
150	250	405	310	250	65
180	280	405	370	250	65
200	300	405	418	250	65
250	350	405	468	310	65
300	400	405	530	310	65
350	450	405	700	330	65
400	500	405	800	330	65
450	550	405	900	330	65
500	600	405	1000	360	65
550	650	435	1000	360	65
600	700	435	1000	360	65
650	750	435	1200	360	65
700	800	475	1250	400	65
750	850	475	1300	400	65
800	900	475	1400	400	65



SEXTTCDPC..




záró DW inox 50 záró kúp DN 80/180 AISI 316L BA

terminal DW inox 50 venturi cone DN 80/180 AISI 316L BA

Øi	Øe	H	A
80	180	200	65
100	200	200	65
130	230	200	65
150	250	200	65
180	280	200	65
200	300	200	65
250	350	200	65
300	400	200	65
350	450	290	65
400	500	290	65
450	550	290	65
500	600	290	65
550	650	290	65
600	700	290	65
650	750	290	65
700	800	290	65
750	850	290	65
800	900	290	65



SEXFASCAC..



Esőgallér


Storm collar

Øi	Øe	H
80	180	70
100	200	70
130	230	70
150	250	70
180	280	70
200	300	70
250	350	70
300	400	70
350	450	70
400	500	100
450	550	100
500	600	100
550	650	100
600	700	100
650	750	100
700	800	100
750	850	100
800	900	100




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304

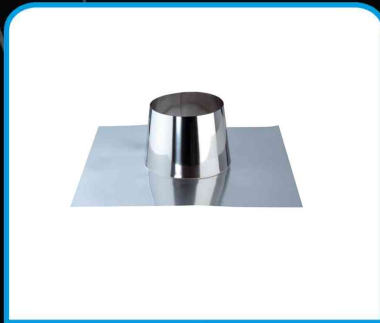

SEXFALDPC..




Tetőátvezető idom

Flat flashing

Øi	Øe	A	H
80	180	500	170
100	200	600	180
130	230	600	210
150	250	600	210
180	280	650	220
200	300	650	230
250	350	700	230
300	400	750	200
350	450	850	200
400	500	900	200
450	550	950	200
500	600	1100	200
550	650	1200	200
600	700	1300	200
650	750	1400	200
700	800	1500	200
750	850	1600	200
800	900	1700	200



SEXFALDR5C..




Állítható tetőátvezető idom 5°-30°

Adjustable flashing from 5° to 30°

Øi	Øe	A	H
80	180	650	170
100	200	650	180
130	230	750	210
150	250	750	210
180	280	750	210
200	300	800	230
250	350	800	230
300	400	800	200
350	450	850	200
400	500	850	200
450	550	900	200
500	600	1100	330
550	650	1200	350
600	700	1300	350
650	750	1400	380
700	800	1500	420
750	850	1600	450
800	900	1700	480



SEXCOLC..



Fali távtartó

Wall bracket

Øe	A	B
80	40	50
100	40	50
130	40	50
150	40	50
180	40	50
200	40	50
250	40	50
300	40	50




SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXRCIDP..




csatlakozó DW inox 50 egyfalú-duplafalú DN 80/180 AISI 316L BA vastagság 0,4 mm

connector DW inox 50 single-double DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	H	A	B	C
80	180	160	54	54	50
100	200	160	54	54	50
130	230	160	54	54	50
150	250	160	54	54	50
180	280	160	54	54	50
200	300	160	54	54	50
250	350	160	54	54	50
300	400	160	54	54	50
350	450	160	54	54	50
400	500	160	54	54	50
450	550	160	54	54	50
500	600	160	54	54	50
550	650	160	54	54	50
600	700	160	54	54	50
650	750	160	54	54	50
700	800	160	54	54	50
750	850	160	54	54	50
800	900	160	54	54	50



SEXGIUDMC..




csatlakozó DW inox 50 duplafalú-egyfalú DN 80/180 AISI 316L BA vastagság 0,4 mm

connector DW inox 50 double - single DN 80/180 AISI 316L BA thickness 0,4 mm

Øi	Øe	H	A	B
80	180	160	65	65
100	200	160	65	65
130	230	160	65	65
150	250	160	65	65
180	280	160	65	65
200	300	160	65	65
250	350	160	65	65
300	400	160	65	65
350	450	160	65	65
400	500	160	65	65
450	550	160	65	65
500	600	160	65	65
550	650	160	65	65
600	700	160	65	65
650	750	160	65	65
700	800	160	65	65
750	850	160	65	65
800	900	160	65	65



SEXDISC..



Fali távtartó

Extension for wall bracket double wall 50 mm insulated

Øi	Øe	H
80	180	50
100	200	50
110	210	50
120	220	50
125	225	50
130	230	50
140	240	50
150	250	50
160	260	50
180	280	50
200	300	50
220	320	50
250	350	50
300	400	50
350	450	50
400	500	50
450	550	50
500	600	50






SDW50 - Duplafalú AISI 316L / AISI 304

SDW50 DOUBLE WALL AISI 316L / AISI 304



SEXFASDCD..




● Szorító bilincs

Locking band double wall 50 mm insulated

Øi	Øe	H
80	180	30
100	200	30
130	230	30
150	250	30
180	280	30
200	300	30
250	350	30
300	400	30
350	450	30
400	500	42
450	550	42
500	600	42
550	650	42
600	700	42
650	750	42
700	800	42
750	850	42
800	900	42



SEXCOLT..



● Kábelrögzítő bilincs

Guy wire bracket double wall 50 mm insulated

Di	De	A
80	180	40
100	200	40
130	230	40
150	250	40
180	280	40
200	300	40
250	350	40
300	400	40
350	450	40
400	500	40
450	550	40
500	600	40

# EXPO INOX



67.6

20

# EXPO INOX



67.6

20



**Expo Inox S.p.a.**  
**Viale Artigianato 6**  
**27020 Borgo San Siro (PV) ITALIA**

**tel. +39 0382 87237**

**fax +39 0382 87330**

**e-mail: [info@expoinox.com](mailto:info@expoinox.com)**

**[www.expoinox.com](http://www.expoinox.com)**